

carif® 260 BSA

SEMI-AUTOMATIC COMPLETELY HYDRAULIC BAND SAW

Standard Features:

1. Robust base structure in steel powder painted with bright and smooth finishing.
2. Bow structure in special aluminum alloy hardened.
3. Patented Hydraulic system for a fine regulation of bow feed and cutting pressure.
4. Blade motor 1,1/1,4 KW; 2 speed regulation 33-66 m/1' .
5. Miter cutting $-45^{\circ}/+60^{\circ}$; bow rotation through conical bearings independent from the plans for piece support.
6. Electrical cabinet easily movable for the best ergonomics.
7. Wide Plans for piece support for a comfortable and practical cutting area.
8. Complete coolant equipment of 50 lt. tank with electro-pump 3ph. inside the basement.
9. Measuring device L=500 mm with height regulation.
 - Large chips container for easy cleaning.
 - Bimetal blade M42 mm 2450x27x0,9, cardboard box + pallet, service wrenches, instruction manual and spare parts list.



CUTTING CAPACITY


90°				-45°				+45°				90° opt.
220	130	150	90	220*/205	100	150	60	260 x 150	120 x 100	150 x 150	90 x 60	260 x 150

* With thickness

L x H

TECHNICAL FEATURES


mm	KW	Optional	m/1'	Optional	mm	Optional	Kg	B	L	H*	h
2450x27x0,9	1,4-0,09	2,2	33-66	15÷100	260	300	340	1250	640	1650 / 1300	830



H* Bow up / Bow down

Optional

1. Air/oil lubrication system 3lt. 2 elements
 - Speed moto-variator, electr. version Kw 2,2
2. Digital angle display
3. Laser-line for positioning
4. Hydraulic device for vertical clamping of bars (1 Piece)
5. Working LED light
 - ▲ Thickness for cutting at 90° (mm 300 x 120 h)

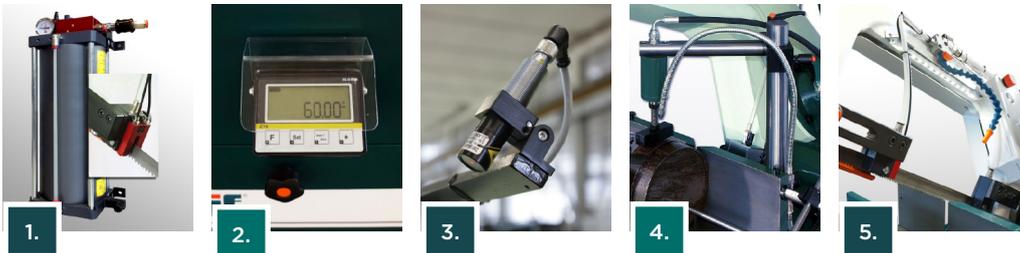

Roller units

Modular roller-unit type “A” :
length 1m - width 400 mm - capacity 0,9 t/m

Modular roller-unit type “B” :
length 1m - width 400 mm - capacity 0,9 t/m

Plan type “C” for connection roller-unit type “A” to the machine:
width 400 mm

Measuring Device

Measuring device graduated in mm type “D”: L = 1 meter

CARIF MS - Measuring System: L = 2-3-4-... meters

CARIF DMS - Digital Measuring System: L = 2-3-4-... meters

