
Carif 450 BA CNC

AUTOMATIC HYDRAULIC BAND SAW WITH NUMERICAL CONTROL

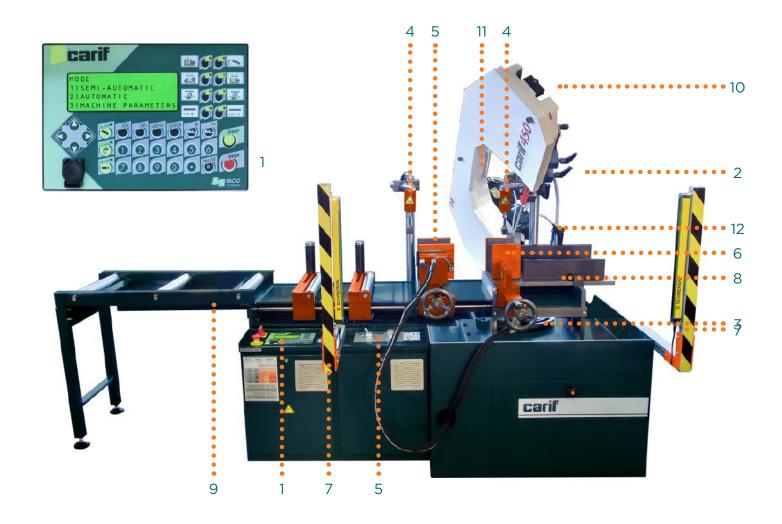

Standard Features:

- 1. 2 Axes numerical control with USB keyfor updates
- Easy and fast storage up to 100 cutting programs with visualization of all parameters
- 2. Speed moto-variator, electronic version Kw 4
- 3. Graduated plate for miter cutting 0/60° independent from the plans for pieces support
- 4. 2 Hydraulic devices for vertical clamping of bars
- 5. Hydraulic block for a fine regulation of bow feed and cutting pressure
- 6. Hardened and carburized jaws for strong fixture and moving of full bars
- 7. Safety guards front and back
- 8. Wide Plans for piece support for a comfortable and practical cutting area
- 9. Roller-unit L=1m for bar support
- 10. Sensor for monitoring blade rotation
- 11. Working LED light
- 12. Flushing hose
- 35Lt. Hydraulic oil for hydraulic power-pack
- Complete coolant equipment of 50 Lt. tank with electro-pump
- Bimetal blade M42 mm 3660x34x1,1, cardboard box + pallet, service wrenches, instruction manual and spare parts list

450 BA CNC CALIF

CUTTING CAPACITY

90°		+45°	+60°	+90°		+45°	+60°	+90° *		+45°	+60°	90° opt.
330		280	170	320*/ 280		250	150	450 x 240		270 x 240	170 x 125	450 x 240

* With thickness

LxH

TECHNICAL FEATURES

m	(KW)	[m/1']				+ H			
mm	KW	m/1'	mm	Kg	В	L	н	h	
3660x34x1,1	4-0,75-0,09	15÷100	450	1600	2250	2950	2000 / 1550	830	

H* Bow up / Bow down

Optional

- 1. Air/oil lubrication system 3lt. 2 elements
- 2. Digital angle display
- 3. Laser line for positioning
- 4. Slide for cut pieces









Roller units

Modular roller-unit type "A" : length 1m - width 500 mm - capacity 3 t/m Modular roller-unit type "B" : length 1m - width 500 mm - capacity 3 t/m Plan type "C" for connection roller-unit type "A" to the machine : width 500 mm

